

# GB HTA 25S4 1150x520 - 1000x685

The standard competitive HPT (2.500 kg)




## GB

The GB hand pallet truck represents an **easy to use, economic and robust** tool for transporting pallet loads.

Reliable and easy to maintain, this model has been designed to be an excellent solution for intense use, thanks to its **lightweight, smooth movement and manoeuvrability**.

GB is the right machine for the customer that is looking for a **simple and sturdy pallet truck**: the right companion for every day work that can adapt in every situation.

Designed with excellent galvanized whole casting AC hydraulic pump, Y type, robust and durable, with fine control of lowering speed and overload valve.

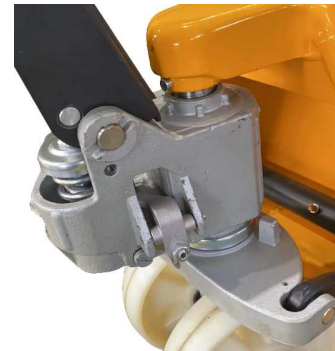

## STANDARD CONFIGURATION

- Nylon steering wheels
- Nylon rollers



## TILLER

Ergonomically designed with rubber grip for optimized safety and comfort.



<b>DESCRIPTION</b>					
MODEL			<b>GB HTA 25S4</b>		
ITEM			<b>1150x520</b>	<b>1000x685</b>	
1.3	DRIVE		MANUAL	MANUAL	
1.4	OPERATOR TYPE		PEDESTRIAN	PEDESTRIAN	
1.5	LOAD CAPACITY	Q	kg	2500	2500
1.6	LOAD CENTRE DISTANCE	c	mm	600	500
1.8	LOAD DISTANCE, CENTRE OF DRIVE AXLE TO FORK	x	mm	885	735
1.9	WHEEL BASE	y	mm	1125	975

<b>WEIGHTS</b>					
2.1	SERVICE WEIGHT		kg	68	70
2.2	AXLE LOAD LADEN, FRONT/REAR		kg	674/1894	676/1895
2.3	AXLE LOAD UNLADEN, FRONT/REAR		kg	44/24	47/24

<b>TYRES/CHASSIS</b>					
3.1	TYRES			Nylon/Nylon	Nylon/Nylon
3.2	TYRE SIZE, FRONT ( $\emptyset$ x width)		mm	200x50	200x50
3.3	TYRE SIZE, REAR ( $\emptyset$ x width)		mm	80x70	80x70
3.5	WHEELS, NUMBER (x=DRIVEN) FRONT/REAR		nr.	2/4	2/4
3.6	TREAD, FRONT	$b_{10}$	mm	130	130
3.7	TREAD, REAR	$b_{11}$	mm	360	525

<b>DIMENSIONS</b>					
4.4	LIFT	$h_3$	mm	115	115
4.9	HEIGHT OF TILLER IN DRIVE POSITION MIN/MAX	$h_{14}$	mm	1230	1230
4.15	HEIGHT, LOWERED	$h_{13}$	mm	85	85
4.19	OVERALL LENGTH	$l_1$	mm	1540	1390
4.20	LENGTH TO FACE OF FORKS	$l_2$	mm	390	390
4.21	OVERALL WIDTH	$b_1$	mm	520	685
4.22	FORK DIMENSIONS	s/e/l	mm	50/160/1150	50/160/1000
4.25	DISTANCE BETWEEN FORK ARMS	$b_5$	mm	520	685
4.32	GROUND CLEARANCE, CENTRE OF WHEEL BASE	$m_2$	mm	37	37
4.34	AISLE WIDTH FOR PALLETS 800x1200 LENGTHWISE	$A_{st}$	mm	1793	1793
4.35	TURNING RADIUS	$W_a$	mm	1275	1125

<b>PERFORMANCE DATA</b>					
5.2	LIFT SPEED, LADEN/UNLADEN		strokes	14	14
5.3	LOWERING SPEED, LADEN/UNLADEN		m/s	0.1/0.06	0.1/0.06

